



MHW-200-5V12A64CH Constant Temperature Chamber

(With Integrated Battery Testing System)

Technical Agreement

Neware Technology Limited

Contact: jade@newarebattery.com


Product Name:

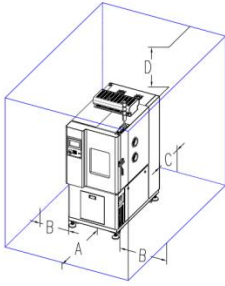
Constant Temperature Chamber
(With Integrated Battery Testing System)

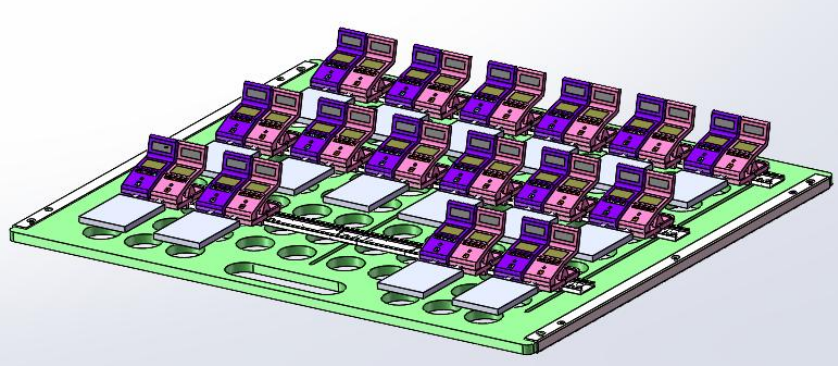


P.S. Image is for reference purpose only.

Model Code	MHW-200-5V12A64CH
Application	Constant temperature tests of battery cells
Prohibitions	Testing or storage of : - flammable, explosive and volatile material samples; - corrosive substances; - strong electromagnetic emission source; - radioactive material samples; - highly toxic substances; - samples that may produce the above substances or objects during testing or storage.
Dimensions	
Nominal Volume	200L
Inner Dimension	W500 mm×D500 mm×H800 mm
Outer Dimension	W600 mm×D920 mm×H1800 mm
Net Weight	Around 260kg
Performance	
Testing Environment	Operating Room Temperature: above 25°C Relative humidity: ≤85%
Temperate Range	0~60°C
Fluctuation	≤1°C (No load, or during stable temperature)
Deviation	±2.0°C (No load, or during stable temperature)
Heating Time	25°C → 60°C ≤30 min (no load, average non-linearity)
Cooling Time	25°C → 0°C ≤50 min (no load, average non-linearity)
Heat Load	≤300W (caused by heat generated during cell charging)

Structure	
Insulation Envelope	<ul style="list-style-type: none"> - Outer wall material: High quality cold rolled steel plate with surface spray paints. - Inner wall material: Stainless Steel SUS304 - Insulation material: Polyurethane foam
Air-conditioning Channel	Axial Fan, heater, evaporator
Standard Configuration	<ul style="list-style-type: none"> - Door: insulated tempered glass + Frames - 4 Lead holes (with soft rubber stopper): $\phi 50\text{mm}$ - 4 casters; - Cell Trays: electrically insulated (load bearing: 10kg/tray); - LED illuminating light.
Control Panel	Control buttons
Heater	Stainless steel heating tube Non-contact equal-period pulse width modulation, SSR
Cooling System	
Refrigeration Compressors	Hermetic Piston Compressor 
Cooling Method	Air-cooled
Throttling Device	Capillary
Refrigerant	R134a
Welding Process	Nitrogen protected welding
Electrical Control System	
Controller	LED digital display + button controller
Setting Method	Button controller
Control Method	Forced circulation ventilation. The system controls the output of the semiconductor refrigeration/heating module through the PID results, in order to achieve a dynamic balance.
Communication	Ethernet
Temperature Control Module	Independent R&D (passed relevant reliability performance tests such as high and low temperature shock tests, vibration tests, EMC tests etc.)

Health and Safety Protection	
Test Chamber	<ul style="list-style-type: none"> - Leakage Protection - Short circuit protection - Operating protection of circulating fan
Other Configuration	
Power Cable	5 cores (three-phase four-wire + protective ground wire)
Leakage Circuit Breaker	Three-phase four-wire + protective ground wire
Conditions of Use	
Installation Site	<ul style="list-style-type: none"> - Level ground, comply with GB50209-2002 Specification. - Flatness $\leq 5\text{mm}/2\text{m}$ - Good ventilation - No strong vibration around the device - No strong electromagnetic fields around the device - No flammable/explosive/corrosive substances & dust around the device. - Appropriate space for use and maintenance should be reserved around the equipment: A: not less than 100cm B: not less than 60cm C: not less than 70cm D: not less than 50cm <p>There should be enough room for the door to be opened and closed normally, and there should be no other objects directly in front of the door of the equipment.</p> 
Environmental Conditions	<p>Temperature: $5^{\circ}\text{C} \sim 35^{\circ}\text{C}$</p> <p>Relative humidity: $\leq 85\%$;</p> <p>Atmospheric pressure: $86\text{kPa} \sim 106\text{kPa}$</p>
Power Supply Condition	<p>Input: AC(220 ± 22)V (50 ± 0.5)Hz single phase + protective ground wire. The grounding resistance of the protective ground wire is less than 4Ω.</p> <p>The user is required to configure an independent air or power switch of the corresponding capacity for the equipment at the installation site.</p>
Distribution Power	2kW(thermal chamber) +6.4kW(power supply)
Maximum Current	4A+13A
Precautions	Opening the door while testing will cause temperature fluctuations. During the test, if the door is opened many times or the door is left open for a long time or the test sample emits moisture, it may cause the heat exchanger of the refrigeration system to frost or freeze and cannot work properly.

Battery Specifications and Placement	
Cell Specification	Pouch/cylindrical cells (max. 64 channels)
Cell Placement	- Max. 16 channels on each tray (depending on specific dimensions of the cells and considering heat generation) - 4 trays in total
Battery Trays (customization available)	
Simulation Diagram (reference only)	
No-Load Operation	